

6.2

RECOMMENDED PARKING


PARALLEL PARKING



Description

The preferred width of a parallel on-street parking lane is 8'0" on commercial streets or where there is an anticipated high turnover of parking, and 7'0" wide on residential streets. These dimensions are inclusive of the gutter pan.

REVERSE-ANGLED PARKING

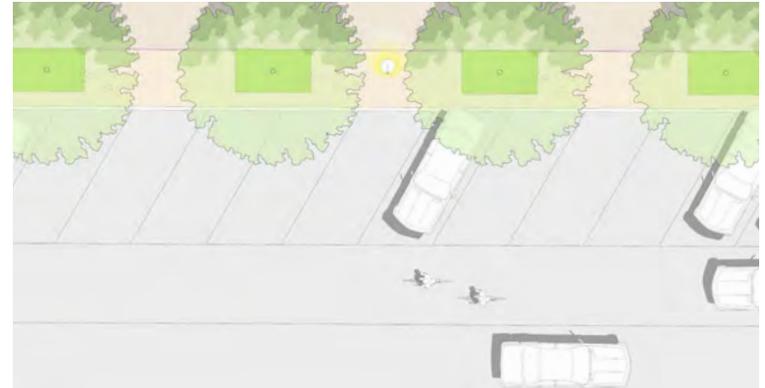

Description

The use of reverse (back-in) angled parking is desirable since it overcomes sight distance concerns and is considered safer for bicyclists traveling adjacent to angled parking.

ACCESSIBLE PARKING



Description

The Americans with Disabilities Act, ADA requires that public and commercial places have accessible parking space available for those with disabilities. Accessible parking spaces should consider the proper identification of spaces, size requirements, location of parking stalls and compliant signage.

